

escea.

GAS FIRE USER GUIDE Australia



EF5000

www.escea.net

630114_2 Userguide AUS

Any service work carried out on this appliance must only be done by a recognised escea technician or authorised personnel.

The data plate for this appliance, containing technical information and specifications, can be found to the right of the control tray, near the base of the fire. To access this, the fascia must be removed.

DO NOT PLACE ARTICLES ON OR AGAINST THIS APPLIANCE.

DO NOT USE OR STORE FLAMMABLE MATERIALS NEAR THIS APPLIANCE.

DO NOT SPRAY AEROSOLS IN THE VICINITY OF THIS APPLIANCE WHILST IT IS IN OPERATION.

IT IS NOT RECOMMENDED TO OPERATE THE FIRE WITH THE FASCIA PANELS REMOVED.

THIS APPLIANCE IS NOT INTENDED FOR USE BY YOUNG CHILDREN OR INFIRM PERSONS UNLESS THEY HAVE BEEN ADEQUATELY SUPERVISED BY A RESPONSIBLE PERSON TO ENSURE THAT THEY CAN USE THE APPLIANCE SAFELY.

YOUNG CHILDREN SHOULD BE SUPERVISED TO ENSURE THAT THEY DO NOT PLAY WITH THE APPLIANCE.

THE APPLIANCE MUST BE INSPECTED BEFORE USE AND AT LEAST ANNUALLY BY AN AUTHORISED TECHNICIAN.

THIS APPLIANCE MUST BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURERS WRITTEN INSTRUCTIONS.

escea. NZ LTD
31 Devon St, PO Box 5277
Dunedin, New Zealand
E-mail: info@escea.co.nz
Web: www.escea.co.nz
Phone: +64 3 4790302

Distributed in Western Australia by
Australian Heating Distributors
31 Clune Street
Bayswater, Perth, Western Australia
web: www.escea.com.au
Phone: +61 8 93737000

Distributed in Australia by
Glen Dimplex
Unit 2, 205 Abbots Road
Dandenong, Melbourne
web: www.escea.com.au
Phone: +61 3 87873567

Contents

Basic Operation _____ 1 - 4

Removing the Fascia _____ 5

Cleaning and Maintenance _____ 6

Basic Operation

The EF5000 is operated by the switch located on the right hand side outer edge of the fascia. The basic operations possible are ON/OFF.

Before operating the fire, ensure the power transformer is plugged into the mains wall socket & turned on, and the supply is turned on.



Ignition:

To turn the fire on push the ON/OFF rocker switch to the on position. The ignition unit will start sparking and the pilot and burners will ignite almost immediately.


In the event of no gas, the ignition unit will attempt to try to light up to 3 times before shutting down.

Turning off the fire:

To turn the fire off, simply flick the ON/OFF rocker switch to the off position. This will shut down the gas flow to the pilot flame and both burners.


Please ensure the gas supply is also turned off, and as an extra safety please turn off the main power supply at the house.

Basic Operation

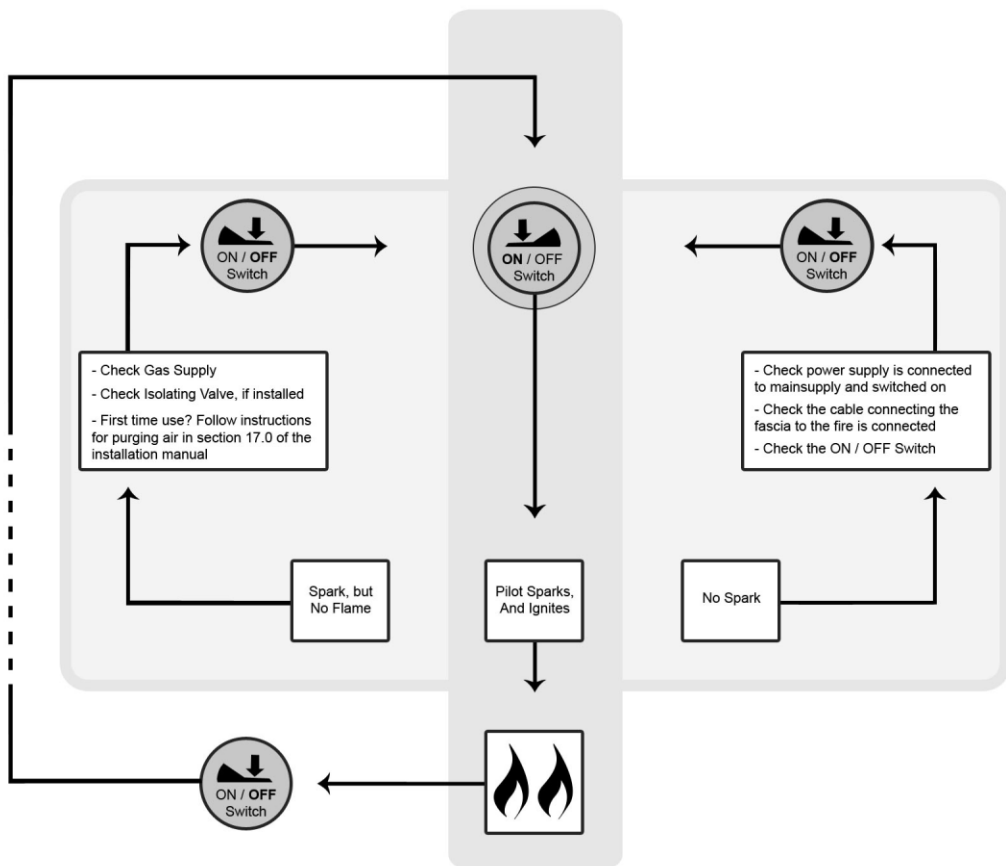


Removing the Fascia

The EF5000 Stainless Steel fascia is attached to the fire by four 'hooks' on the corners of the fascia. If you need to remove the fascia, first give the fascia a brief lift upwards as shown.

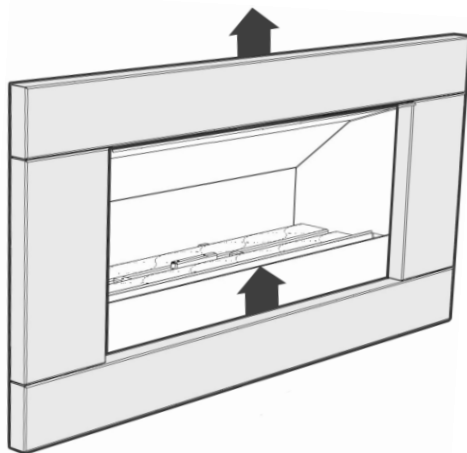

Now slide the fascia towards you until it falls into the additional slot, unplug the electrical cord. Now you can rest the Fascia on the ground.

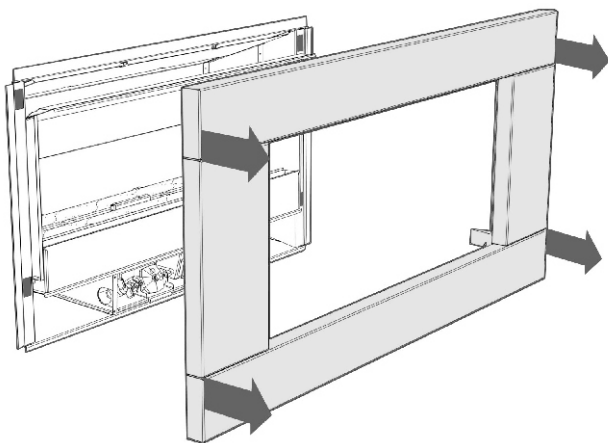

Reverse these steps to re-fit the Fascia, ensuring the two connections are correctly plugged in by testing the fire.

Cleaning your EF5000

To clean the glass and stones in the front stone tray simply reverse the steps in section 14.0 of the Installation Manual.

The glass can be cleaned using standard window cleaner. The quartz stones can be washed using soapy water

If the stainless steel fascia requires cleaning the following products are recommended; 3M Stainless steel cleaner or methylated spirits.

To clean the weather cover or the powder coated or stone fascia options warm soapy water should be used.

Cleaning of the ceramic stones and burners can be carried out using a brush and a dry cloth.