


The art of smart-heating, for inside and out



The Range

PLATINUM SMART-HEAT 300/500

Gas

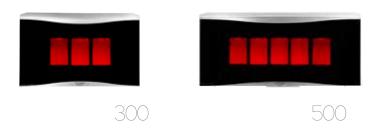

Electric





TUNGSTEN SMART-HEAT 300 / 500

Gas



Electric





Innovation meets aesthetics, to bring you a powerful range of heaters that re-defines the world of heating. Patented Platinum Smart-Heat provides benefits never before seen in outdoor gas radiant heaters.

Our Gas Range gives you electronically controlled smartsafety; smart wind-resistance; one-switch, on/off smart venue-integration; smart cost-efficiency; wall or ceiling smart-mounting; flexible and directional smart-heating.

PLATINUM SMART-HEAT

Top quality performance and the looks to match

The brushed stainless steel and ceramic medium makes Platinum Smart-Heat $^{\text{TM}}$ Gas suitable for the most exclusive outdoor or home environments. By protecting the tiles behind its translucent ceramic medium, effective heat is guaranteed in winds of up to 18 km/h.



Able to withstand very high temperature, the tinted ceramic transforms obtrusive red glare emitted by traditional tiles into a soft glow. This enhances the overall experience of warmth, while ensuring even heat distribution.



Platinum Smart-Heat[™] Gas 300 Series Available in 300 / 500 Series LPG / Natural Gas







Smart-safety means that electronic controls allow automatic re-ignition if the heater goes out. The integrated flame safety shut-off turns the heater off if it does not re-ignite.



Warm and even "comfort" heat is achieved by passing the radiant heat through the tinted ceramic medium. Directional ceiling or wall mounts create true positioning versatility. A dual-layer heat deflector allows for low-clearance installations.




riniti's Darling Harbour, Sydne



Soft, radiant heat and an ultra-thin design

Non-glowing – the Platinum Smart-Heat $^{\text{TM}}$ Electric complements the atmosphere of any home or commercial environment.

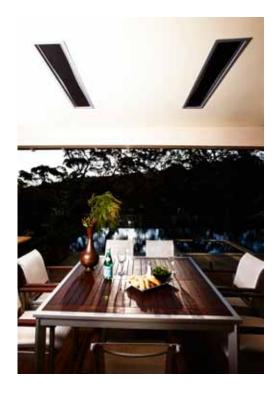




Platinum Smart-Heat[™] Electric Available in 1500W output







Wind and weather resistant, the Platinum Smart-Heat™ Electric provides soft, radiant heat flow. One or more heaters can be switched on and off simultaneously from a single remote-located switch.

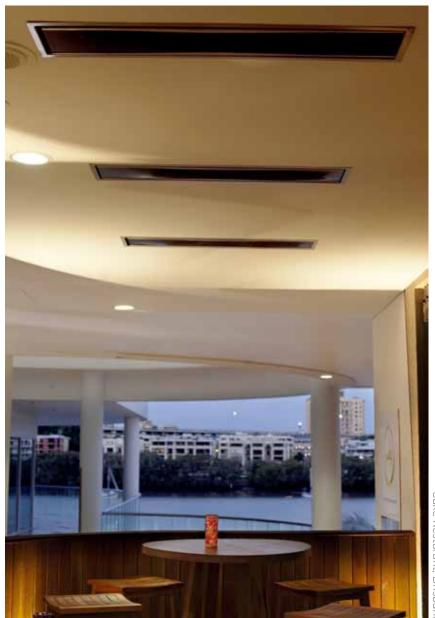

Suitable for low-clearance ceilings, the heater features multiple mounting options, including: recessed, wall-mounted, ceiling-mounted, ceiling pole-suspension, ceiling chain-suspension. The Platinum Smart-Heat™ Electric is easily integrated into smart control systems.



Resturant, Brisban

TUNGSTEN SMART-HEAT

A designed, costconscious product range that does not sacrifice aesthetics for function

The patented direct ignition system, never before seen on an outdoor gas radiant heater, ensures a reliable start and effective operation, even in winds of up to 13km/h.



Bavarian Bier Cafe, Brisbane



Tungsten Smart-Heat[™] Gas 300 Series Available in 300 / 500 Series LPG / Natural Gas







Stainless steel with high temperature ceramic coating, maximizes long life and durability in tough outdoor environments. A neutral black finish ensures a fit with all decors.




Tungsten Smart-Heat[™] Gas 500 Series





An infrared electric heater blending aesthetics and function

It's stylishly designed provides efficient directional heating, compatible with smart control systems to enable precise dimming control with it's simple one-touch on/off switch.

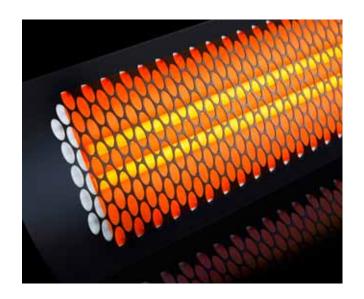





Tungsten Smart-Heat[™] Electric 2000W / 4000W



Tungsten Smart-Heat[™] Electric 3000W / 6000W







Water / splash resistance, the Tungsten Smart-Heat™ Electric works in almost any weather condition. The swivel bracket allows the heat to be directed in the desired location. It's equipped with a spectral reflector for excellent radiant heat output.



Tungsten Smart-Heat™ Electric like its predecessors is wall and ceiling mountable. It is available in four models of varying heating power, and carries on the legacy of innovation meeting aesthetics..

Specifications

PLATINUM SMART-HEAT

300/500

Gas



Heat output Dimensions excl. bracket Approx, area heated Approx. weight

2620130 (LPG), 2620131 (NG) 25Mj 560(W) x 382(D) x 428(H)mm Up to 12m



Part no. Heat output Dimensions excl. bracket Approx. area heated Approx. weight

2620140 (LPG), 2620141 (NG) 42Mj 756(W) x 382(D) x 428(H)mm Up to 20m

Electric 1500



Heat output Dimensions excl. bracket Power connection Approx. weight

1500W 960(W) x 180(D) x 40(H)mm 240V / 6.5Amp 6.5kg

TUNGSTEN SMART-HEAT

300 / 500

Gas



Heat output Dimensions excl. bracket Approx, area heated Approx. weight

2620330 (LPG), 2620331 (NG) 490(W) x 464(D) x 428(H)mm Up to 12m



Part no. Heat output Dimensions excl. bracket Approx, area heated

2620340 (LPG), 2620341 (NG) 42Mj 646(W) x 464(D) x 428(H)mm Up to 20m

2000 / 3000 / 4000 / 6000 Electric



Heat output Dimensions excl. bracket Power connection Approx, weight

2620212 (2000W), 2620214 (4000W) 2000W; 4000W 1117(W) x 214(D) x 86(H)mm 230V / 8.3Amps (2000W); 16.6Amps (4000W) 9ka

Heat output
Dimensions excl. bracket
Power connection Approx, weight

2620213 (3000W), 2620215 (6000W) 3000W; 6000W 1410(W) x 214(D) x 86(H)mm 230V / 12.5Amps (3000W); 25Amps (6000W) 10ka

2000 / 4000

3000 / 6000

HEAD OFFICE: 1 Suttor Street, Silverwater, Sydney NSW 2128 Australia HEAD OFFICE POSTAL: PO Box 6062, Silverwater, Sydney NSW 1811 Australia T: 1300 276 642 (within Australia) OR +61 2 9748 3900 F: +61 2 9748 4289 E: info@bromicheating.com W: www.bromicheating.com

Due to the nature of the printing process, colors shown in illustrations and photographs may vary from the actual product. Bromic Heating Pty Ltd reserves the right to change all drawings, figures and specifications without further notice. Check with your local government and state authority for applicable standards for installation and operation. All heaters must be installed by a licensed technician (gas and electric). Gas heaters must be installed in outdoor locations only. V3