



Compatibility

- DVL GSR NB Insert
- DVL GS NB (AU) Inbuilt

Packing List

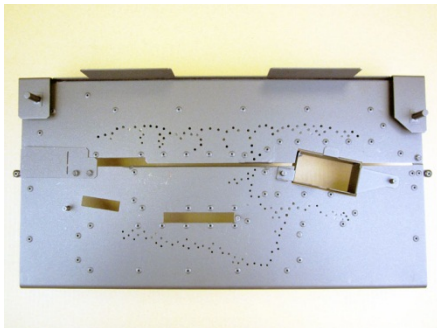

DVL Dancing Fyre Burner Assembly
with Air Deflector and Pilot Shield




Right and Left Ember Trays



Front Log Plate
(used with logs only –
see Media Installation)





3-Way Pilot Hood

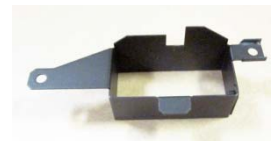



NOTE: The pilot shield ships
installed, but is not
mechanically fastened to the
burner pan.

Burner Installation

1. Remove the glass to access the firebox cavity.
2. Remove the existing pilot hood and attach the 3-way pilot hood to the pilot assembly.


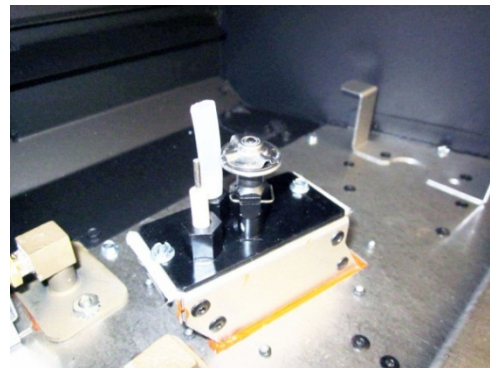
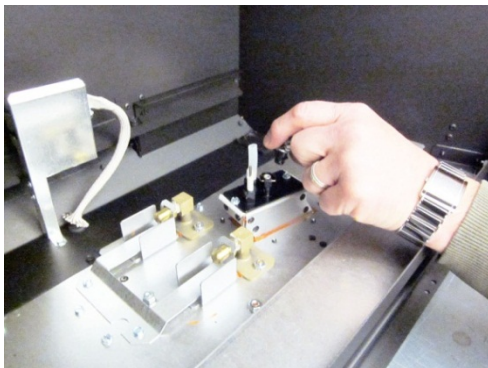


3. The air deflector is shipped in place (see illustration below). For NG, leave it in place. For LP, remove and discard it.

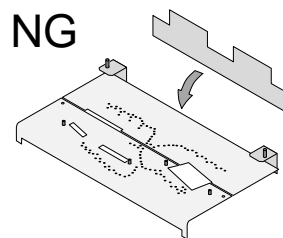

4. Disable the light by removing the bulb and laying the housing flat inside the firebox cavity. Replace the screw from the light bracket into the firebox floor.



NOTE: Ignore this step if using the Traditional Log Set (SKU #94500561).

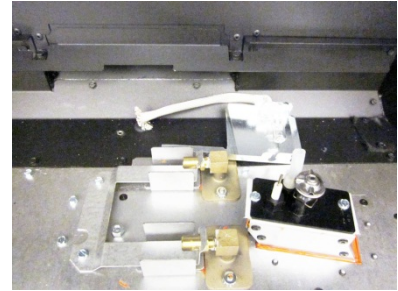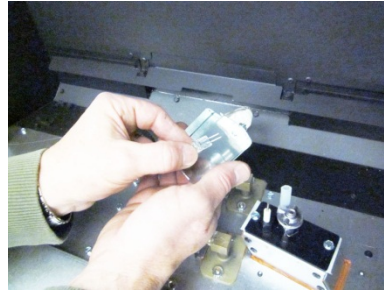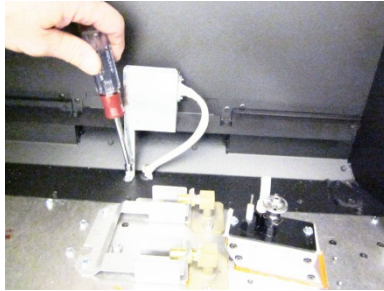



5. Install the burner and side ember trays as shown below:
 - a. Remove the burner attachment screws from the firebox floor.




- b. Install the burner, attach with the screws that were removed from the firebox floor in step "a".
NOTE: Make sure the burner is fully seated over the orifices. The burner should be aligned all the way to the right.

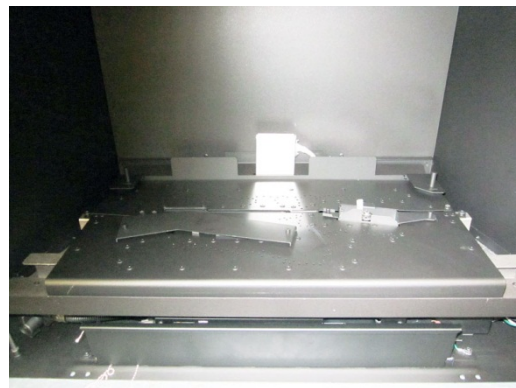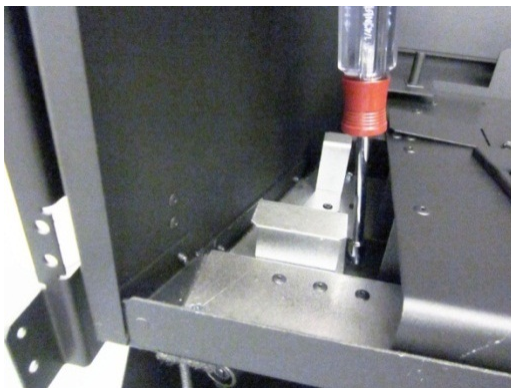

- c. Attach the side ember trays using the included screws, as shown below.

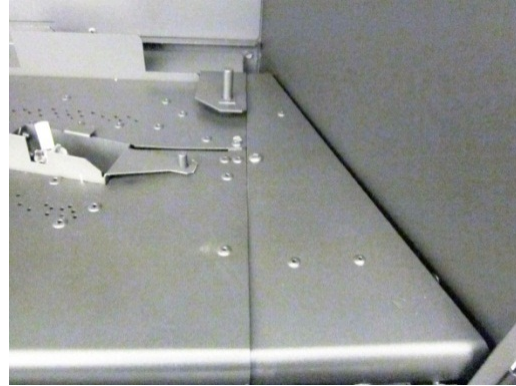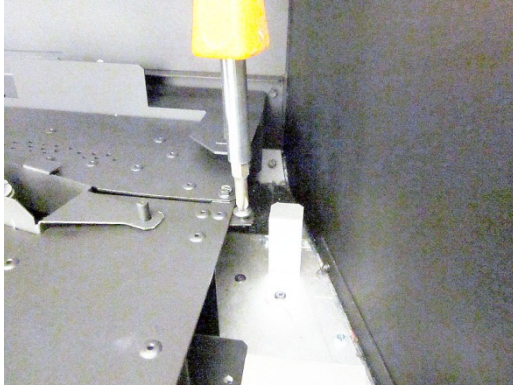

An overview of the burner installation is shown below.

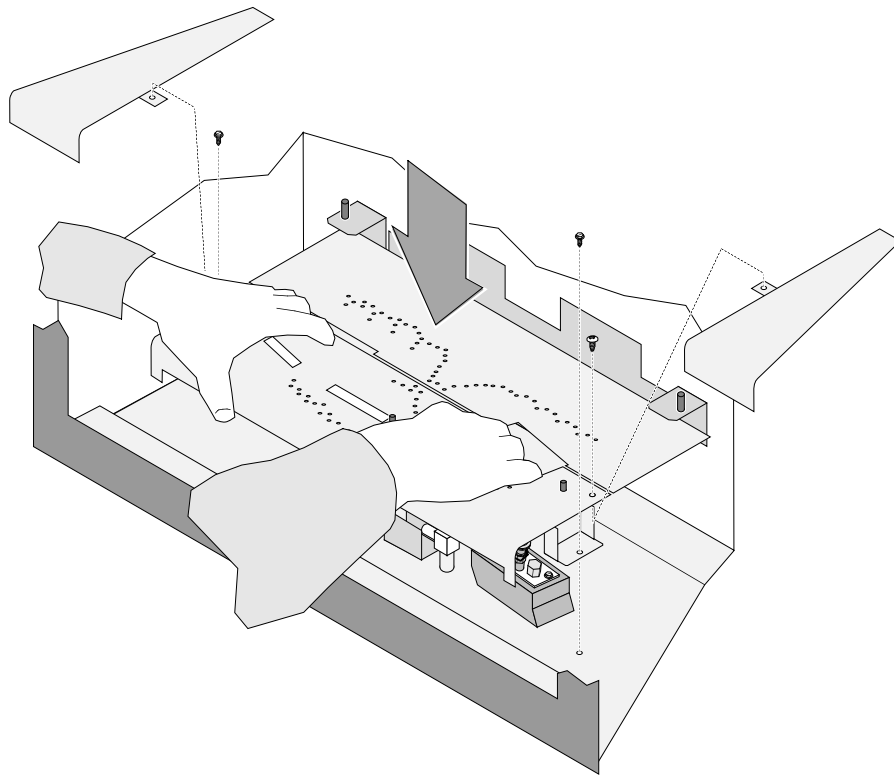

6. Install the selected media option kit (log or stone set) following the instructions included with the kit:
- 94700734 Stone Set, 33 DVI Fyre-Stones
 - 94500562 Log Set, 33 DVI Driftwood
 - 94500561 Log Set, 33 DVI Traditional