

Lopi™ Cedar Freestanding Direct Vent Gas Fire



Lopi Cedar Shown with Black Door

Door Options



Black & Brushed Nickel Plated Door, Grill & Ashlip

24 Karat Gold Door & Grill Only

America's Favourite Fire

Lopi gas stoves and fireplace inserts have been America's favourite choice in fire for over twenty-five years. Our reputation for solid craftsmanship, reliable performance and unbeatable heating efficiency has been a winning combination year after year, and the favourite fire of families across the nation.

The Lopi Cedar direct vent gas freestanding stove is a versatile heat source for your home. The beautiful true bay design provides an unobstructed view of the fire from every corner of the room.

The Cedar Gas Stove comes standard with black door, black convection grill, and black top trivet. You can accessorise your Cedar with many options as seen on the following page.

Features

- Approved convection space heater (high efficiency)
- Removable safety screen in front of glass
- Patented Ember-Fyre™ Burner System
- Standard wall switch included
- Direct vent chimney system preserves indoor air quality
- Shut-off valve included in fireplace
- LP conversion kit included at no additional cost
- Convection fan for increased heat transfer
- Multiple door options




Specifications & Dimensions

32Mj per hour (high) NG/LP
 16Mj per hour (low) NG/LP
 Heats up to 100sq metres


Overall Height: 711mm
 Overall Width: 572mm
 Overall Depth: 448mm

Clearances to Combustibles


All measurements are to be measured from stove top to combustible walls



Cedar Wall Installation
 A: Stove to Sidewall: 254mm
 B: Stove to Backwall: 127mm



Cedar Corner Installation
 C: Stove to Corner: 127mm



Cedar Alcove Installation
 Min Width: 1080mm
 Max Depth: 1219mm
 Min Height: 1574mm

Minimum Hearth Sizes

A non-combustable hearth is required when the stove is installed directly on carpeting, vinyl or combustible flooring other than wood. A metal or wood hearth must extend the full width and depth of the stove. No hearth is required if the stove is installed on non combustible flooring (tile, stone, brick) or if installed on a wood or laminate floor.

Minimum Hearth

Size: 572mm x 448mm

Improper installation of your gas appliance or failure to operate it in accordance to the guidelines detailed in the Owner's Manual may negate your warranty and endanger your home and family. Installation information is available on our website at: www.lop.com.au. We recommend all Lopi appliances be installed and maintained on an annual basis by your local authorised Lopi dealer.

Authorised Lopi Dealer:

Optional Enhancements

- Multiple finish door options
- Remote control thermostat
- Wall thermostat for complete hands-free operation



Wall Thermostat




Remote Control

No Power, No Problem

All Lopi gas appliances will continue to operate even if the power goes out. Our gas appliances produce a small amount of electricity (milivolts), which continue to energise the gas valve and allow the appliance to heat even when the power goes down in your community. So when the power goes out, stay warm with your Lopi and have the neighbours over!

Direct Vent Gas Systems

All Lopi gas appliances feature only the safest and most efficient type of gas venting, the Direct Vent System. The Direct Vent System draws outside air into a SEALED firebox for combustion, and vents the by-products of that combustion to the outdoors, which helps maintain indoor air quality. This safe, sealed system is the only gas venting system we use on all Lopi gas products.

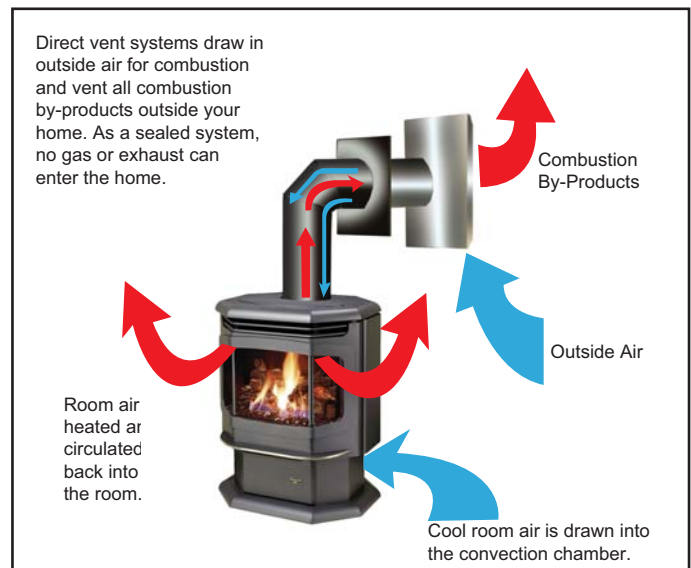

Distributed in Australia
 by Dragon Wholesaling Pty Ltd
 Ph. 1800 064 234
www.lop.com.au

